

Performance of grid-connected PV

PVGIS-5 estimates of solar electricity generation:


Provided inputs:

Latitude/Longitude: 38.506, 22.370
Horizon: Calculated
Database used: PVGIS-SARAH
PV technology: Crystalline silicon
PV installed: 499.79 kWp
System loss: 14 %


Simulation outputs

Slope angle: 20 °
Azimuth angle: 0 °
Yearly PV energy production: 737078.76 kWh
Yearly in-plane irradiation: 1896.79 kWh/m²
Year-to-year variability: 27517.12 kWh
Changes in output due to:
Angle of incidence: -2.69 %
Spectral effects: 0.42 %
Temperature and low irradiance: -7.48 %
Total loss: -22.25 %


Outline of horizon at chosen location:

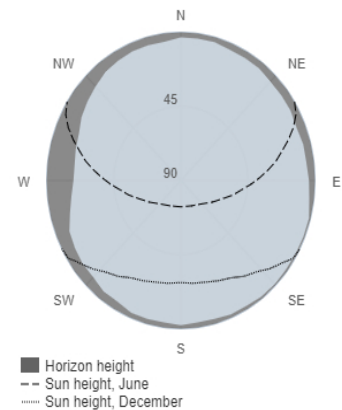

Monthly energy output from fix-angle PV system:

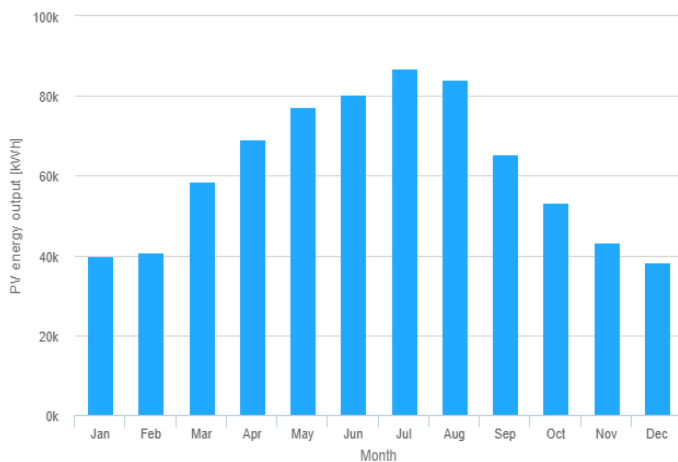

Monthly in-plane irradiation for fixed-angle:

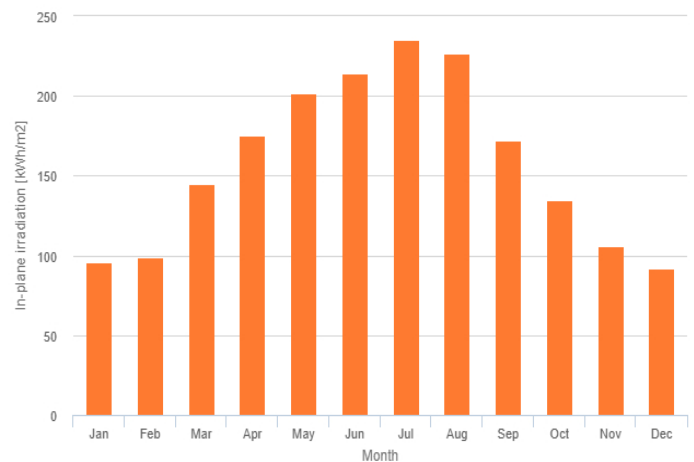

Monthly PV energy and solar irradiation

Month	E_m	H(i)_m	SD_m
January	39781.295.4	6257.0	
February	40881.398.8	5122.1	
March	58642.9145.0	7703.2	
April	69044.7175.5	4164.8	
May	77185.0201.5	5185.8	
June	80311.3214.6	5094.6	
July	87024.6235.0	3862.3	
August	84223.7226.7	2710.1	
September	65484.3171.8	5823.1	
October	53123.3134.6	5074.5	
November	43208.2106.1	6893.7	
December	38168.292.0	6692.1	

E_m: Average monthly electricity production from the given system [kWh].

H(i)_m: Average monthly sum of global irradiation per square meter received by the modules of the given system [kWh/m²].

SD_m: Standard deviation of the monthly electricity production due to year-to-year variation [kWh].